

High Efficient Flood Light


# HRDS-18 SERIES



SEBP-HRDS-18



SEBP-HRDS-18-B

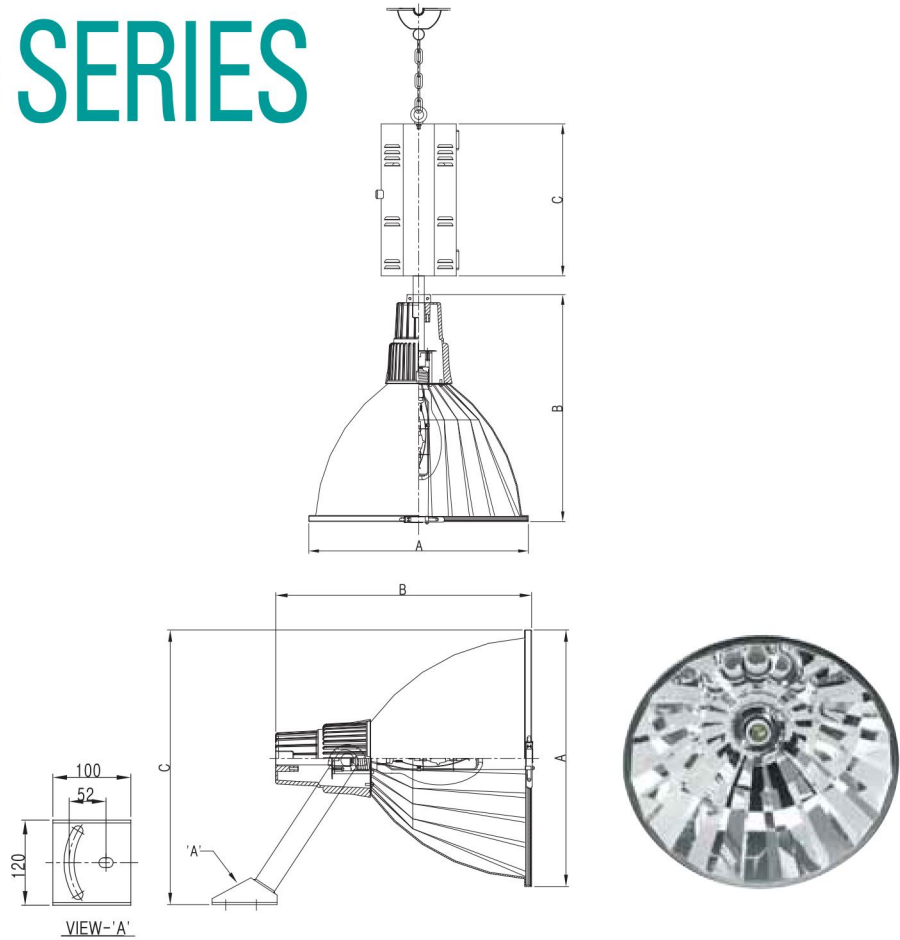

## Technical Data

| Catalog No.    | Watt     | Lamp    | Dimension |     |     |
|----------------|----------|---------|-----------|-----|-----|
|                |          |         | A         | B   | C   |
| SEBP-HRDS-18   | Max.400W | MH,NH,H | 440       | 460 | 305 |
| SEBP-HRDS-18-B | Max.400W | MH,NH,H | 440       | 440 | 390 |



### Application

- Medium and large factories, large showrooms, steel, refining, power plants, shipyards, etc. are used for lighting apparatus.
- Ski resorts, golf courses, athletic fields, etc. are used in the place you need high intensity.



### Standard Materials

- Socket Housing : Die Casting Aluminium
- Socket : Porcelain with Mogul Socket E39
- Reflector : 95% Total Reflection 18 Angle Type  
Anodised Aluminium Oxide Reflector.



### Features

- The optimum reflection & diffusion of light.
- Remove the dead zone
- Enlarge the specular surface.
- Enhance reflexivity through the diffused reflection.
- Anodizing & PVD coating.
- Easy adjustment of socket height which allows convenient angle and illuminance adjustment.



### Standard Finish

- MUNSELL No. 7.5BG 6/1.5
- If you want another color, contact us please.